


コ型ボルト ラインナップ一覧

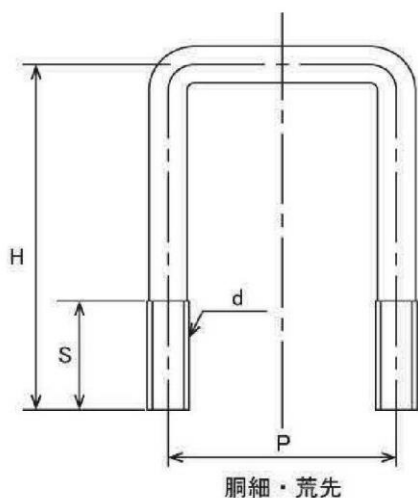

| 型番 | 角パイプ チャンネルサイズ | d | P | H | S |
|---------------|------------------|-----|-----|-----|----|
| WKO-5050-8 | □50×□50 | M8 | 60 | 75 | 30 |
| WKO-5050-10 | □50×□50 | M10 | 62 | 80 | 30 |
| WKO-5050-12 | □50×□50 | M12 | 65 | 85 | 35 |
| WKO-6030-10 | □60×□30 | M10 | 72 | 62 | 30 |
| WKO-6030-12 | □60×□30 | M12 | 75 | 65 | 35 |
| WKO-75125-12 | □75×□125 | M12 | 90 | 160 | 35 |
| WKO-75125-16 | □75×□125 | M16 | 95 | 170 | 40 |
| WKO-7540-10 | □75×□40 | M10 | 87 | 70 | 30 |
| WKO-7540-12 | □75×□40 | M12 | 90 | 75 | 35 |
| WKO-7545-8 | □75×□45 | M8 | 85 | 70 | 30 |
| WKO-7545-10 | □75×□45 | M10 | 87 | 75 | 35 |
| WKO-7545-12 | □75×□45 | M12 | 90 | 75 | 35 |
| WKO-7575-8 | □75×□75 | M8 | 85 | 100 | 30 |
| WKO-7575-10 | □75×□75 | M10 | 87 | 105 | 35 |
| WKO-7575-12 | □75×□75 | M12 | 90 | 110 | 35 |
| WKO-10050-12 | □100×□50 | M12 | 115 | 85 | 35 |
| WKO-10050-16 | □100×□50 | M16 | 118 | 95 | 40 |
| WKO-100100-12 | □100×□100 | M12 | 115 | 135 | 35 |
| WKO-100100-16 | □100×□100 | M16 | 120 | 145 | 40 |
| WKO-12550-12 | □125×□50 | M12 | 140 | 85 | 35 |
| WKO-12550-16 | □125×□50 | M16 | 145 | 95 | 40 |
| WKO-12565-12 | □125×□65 | M12 | 140 | 95 | 35 |
| WKO-12565-16 | □125×□65 | M16 | 145 | 105 | 40 |
| WKO-12575-12 | □125×□75 | M12 | 140 | 110 | 35 |
| WKO-12575-16 | □125×□75 | M16 | 145 | 120 | 40 |
| WKO-15075-12 | □150×□75 | M12 | 165 | 110 | 35 |
| WKO-15075-16 | □150×□75 | M16 | 170 | 120 | 40 |
| WKO-15080-12 | □150×□80 | M12 | 165 | 115 | 35 |
| WKO-15080-16 | □150×□80 | M16 | 170 | 125 | 40 |
| WKO-150150-12 | □150×□150 | M12 | 165 | 185 | 35 |
| WKO-150150-16 | □150×□150 | M16 | 170 | 195 | 40 |
| WKO-150100-16 | □150×□100 | M16 | 170 | 145 | 35 |
| WKO-350250-12 | □350×□250 | M12 | 365 | 285 | 35 |
| WKO-350250-16 | □350×□250 | M16 | 370 | 295 | 40 |

富田螺子株式会社

TOMITARASHI トミタラシ

〒146-0082 東京都大田区池上7-21-3

TEL:03-3754-6228

FAX:03-3755-2913

Mail:bolt.nut.w@nifty.com